


D6P_E Series 210W - 230W

About DeSolar

Founded in 1971, the Delta Group is a global leader in power management and renewable energy solutions. DeSolar, as a subsidiary of Delta Group/Electronics, has become a leading solar cell and module provider with proven process innovation, state-of-art manufacturing technology, world-class cell efficiency, and record productivity yields since its inception in 2004.

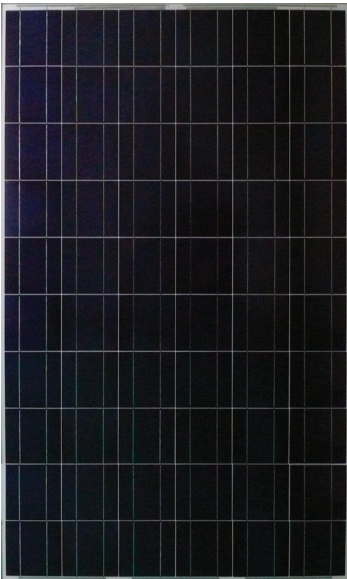

High Performance

- Power tolerance of 0 to +3% provides a stable, high-energy system output
- High PV cell shunt resistance increases power output under low light conditions
- Low temperature coefficients of power enable high power output under all weather conditions
- High-efficiency solar cells and state-of-art manufacturing technology lead to cost efficacy per kWh
- High wind/snow load tolerant

Reliability & Certifications

- 25-year limited warranty on power output & 5-year product warranty
- 25-year performance warranty
 - 10 years: 90% minimum performance
 - 25 years: 80% minimum performance
- IEC 61215, IEC 61730, UL1703
- Compliant with the Buy American Act
- California Energy Commission listed



Contact DeSolar

sales@delsolarpv.com
solar.sales@delta-corp.com



Cleave Energy Inc.

(613) 476-9260, robert@cleave-energy.com

www.cleave-energy.com

MODULE FRONT VIEW	MODEL	D6P210A3E	D6P215A3E	D6P220A3E	D6P225A3E	D6P230A3E
	Maximum Rating Power (P_{max})	210 W	215 W	220 W	225 W	230 W
	Open Circuit Voltage (V_{oc})	36.60 V	36.72 V	36.90 V	37.08 V	37.20 V
	Maximum Power Voltage (V_{pm})	28.72 V	28.86 V	29.20 V	29.34 V	29.49 V
	Short Circuit Current (I_{sc})	7.93 A	8.00 A	8.13 A	8.27 A	8.39 A
	Maximum Power Current (I_{pm})	7.32 A	7.45 A	7.54 A	7.67 A	7.80 A
	Module Efficiency	13.0 %	13.4 %	13.6 %	14.0 %	14.3 %
	Dimension	1626 mm (L) x 990 mm (W) x 38.1 mm (D) / 64" (L) x 39" (W) x 1.5" (D)				
Weight	20 kg / 44.09 lbs					

MODULE BACK VIEW						
	Solar Cells	60 multicrystalline 6" silicon cells (156 x 156 mm)				
	Mechanical Load	5400 Pa				
	Maximum System Voltage	IEC: DC 1000 V / UL: DC 600 V				
	Series Fuse Rating	15 A				
	Operating Temperature	-40 to 90 °C				
	Normal Operating Cell Temperature	46 ± 1 °C				
	Temperature Coefficient of P_{max}	-0.46 % / °C				
	Temperature Coefficient of V_{oc}	-0.35 % / °C				
	Temperature Coefficient of I_{sc}	0.05 % / °C				
		* Electrical data under Standard Test Conditions (STC): 25 °C, 1000 W / m ² , AM 1.5 * Values w/o tolerance are typical numbers				

AI FRAME SECTION VIEW	DEPENDENCE ON TEMPERATURE	DEPENDENCE ON IRRADIANCE
-----------------------	---------------------------	--------------------------

